

0 / 527079

PCT/DK03/00593

09 MAR 2005



REC'D 30 OCT 2003

WIPO

PCT

# Kongeriget Danmark

Patent application No.: PA 2002 01350

Date of filing: 13 September 2002

Applicants: Danfoss A/S  
(Name and address) DK-6430 Nordborg  
Denmark

Title: Control valve with elastomeric valve element..

IPC: F 16 K 3/28

Tis is to certify that the attached documents are exact copies of the above mentioned patent application as originally filed.



Patent- og Varemærkestyrelsen  
Økonomi- og Erhvervsministeriet

08 October 2003

Bo Z. Tidemann

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

  
PATENT- OG VAREMÆRKESTYRELSEN

BEST AVAILABLE COPY

13/09 '02 12:39 FAX 74882003

DANFOSS PATENT DPT.

0002/015

Modtaget

13 SEP. 2002

PVS

02 01 583 030

- 1 -

Control valve with elastomeric valve element

This invention relates to control valves for controlling of fluid flow, where the flow-controlling element in the valve body is of an elastomeric material.

5

A valve of this kind is known from US 5,267,585, where an elastomeric ball-shaped element is placed inside a control chamber of a flow control valve. By pressing this ball-shaped elastomeric element it will deform, and hereby

10 reduce the flow volume from an inlet passage to an outlet passage in the valve body. Completely pressing the element will completely block the flow volume, whereby the valve will be closed.

15 The valve disclosed in US 5,267,585 consists of a number of different parts, which has to be assembled to form the valve. Also the valve will be fully open in an unactivated situation, and the fluid flow will have no impact on the degree of opening. A limitation of the flow will thus need  
20 a separate valve connected in a serial matter with the flow through the control valve.

A flow control valve will usually influence the degree of flow by a relative movement between a valve member and  
25 valve body, as is the case with the valve of US 5,267,585. In the following flow control function is to be understood as any controlled influence the flow control valve will give to the degree of fluid flow, either due to the rate of fluid flow itself or due to an activation of the valve.

30

13/09 '02 12:39 FAX 74882003

DANFOSS PATENT DPT.

003/015

- 2 -

It is an object of this invention to simplify the manufacturing of a control valve. It is a further object of this invention to provide a control valve, which will be closed in an unactivated situation. It is yet a further object of this invention to provide a control valve where the fluid flow will influence the degree of opening of the control valve.

The object of this invention is achieved in that flow forces from fluid communicated from one of the fluid passages to the other of the fluid passages will act on the elastomeric element and hereby form at least a part of the flow control function. Hereby is achieved that limitations in rate of fluid flow or in direction of fluid flow are made as self-acting controls inside the control valve, obtained by proper dimensioning of the elements of the valve.

Preferably the level of the flow forces, needed to perform at least a part of the flow function, is lower from the fluid outlet passage to the fluid inlet passage, than from the fluid inlet passage to the fluid outlet passage. Hereby is achieved that a flow rate restriction and a non-return function is obtained inside one valve and by only one closing or restriction member.

In one embodiment of the invention only the flow forces forms the flow control function. Hereby is obtained that a self-acting flow direction control valve can be made very simple.

In another embodiment of the invention, an actuating member is fixed to the elastomeric element, and the flow control function is, in addition to being formed by the flow forces, formed by activating the actuating member.

- 3 -

Hereby is achieved that an external control function is added to the valve, however still using only one closing or restriction member.

5 Preferably the elastomeric element, when the actuating member is not activated, prevents the fluid inlet passage from being in fluid communication with the fluid outlet passage. This will give a normally closed valve, meaning a valve, which is closed when no forces are applied to the  
10 valve.

Preferably the control chamber, when the actuating member is not activated, is completely filled by the elastomeric element. Hereby is achieved that the elastomeric element  
15 can be moulded inside the control chamber, whereby production of the valve is very simple.

In one embodiment of the invention the elastomeric element, when the actuating member is activated, will be  
20 influenced by the flow forces, and by exceeding a certain level of flow forces will separate the fluid outlet passage from fluid communication with the control chamber. Hereby is obtained that an excessive flow rate will lead to a closing of the valve, whereby flow is prevented until  
25 normal pressure conditions between inlet and outlet of the valve is obtained.

Now having described the invention in general terms,  
detailed embodiments of the invention is to be described  
30 with reference to the drawings:

Fig. 1: Sectional view of one embodiment of the invention in closed position.

Fig. 2: Sectional view of figure 1.

13/09 '02 12:40 FAX 74882003

DANFOSS PATENT DPT.

005/015

- 4 -

- Fig. 3: Sectional view of one embodiment of the invention in open position.
- Fig. 4: Sectional view of figure 3.
- Fig. 5: Sectional view of a second embodiment of the invention in closed position.
- 5 Fig. 6: Sectional view of figure 5.
- Fig. 7: Sectional view of a second embodiment of the invention in open position.
- Fig. 8: Sectional view of figure 7.
- 10 Fig. 9: Sectional view of a third embodiment of the invention in an uninfluenced situation.
- Fig. 10: Sectional view of a third embodiment of the invention in one influenced situation.
- Fig. 11: Sectional view of a third embodiment of the invention in another influenced situation.
- 15

Reference numbers on each figure is kept identical for equivalent elements. This means that following reference list will indicate elements in all figures where the reference is used.

20

- Ref. 1: Valve body
- Ref. 2: Fluid inlet passage
- Ref. 3: Fluid outlet passage
- 25 Ref. 4: Elastomeric valve element
- Ref. 5: End part
- Ref. 6: End part
- Ref. 7: Actuating member
- Ref. 8: Support element
- 30 Ref. 9: Screws
- Ref. 10: Arrow
- Ref. 11: Fluid flow volume
- Ref. 12: Slots
- Ref. 13: Top part of elastomeric valve body
- 35 Ref. 14: Control part of elastomeric valve body

13/09 '02 12:40 FAX 74882003

DANFOSS PATENT DPT.

0008/015

- 5 -

Turning now to figure 1, a valve body 1 expose a fluid inlet passage 2 and a fluid outlet passage 3. A control chamber is formed as a bore radial to the two fluid passages, and in this bore an elastomeric element 4 is placed. The elastomeric element expose two end parts 5 and 6, each with a larger diameter than the body of the elastomeric element 4. The elastomeric element is moulded inside the valve body, and the two end parts 5 and 6 are for the purpose of retaining the elastomeric element in the valve body.

An activating member 7 is fixed by moulding inside the elastomeric element, and is extending to the external of the valve body. A supporting member 8 is placed on the side of the valve body where the actuating member is extending, hereby giving an additional support for the elastomeric element against the influence from activating of the actuating member. The supporting member 8 is mounted to the valve body by means of screws, indicated as position 9.

As the elastomeric element is moulded inside the valve body, the control chamber is completely filled with the elastomeric element. Fluid is thus unable to flow from the inlet passage 2 to the outlet passage 3, or reverse, when the actuating member is inactivated like in figure 1.

Sectional view A-A of figure 1 is shown in figure 2, where it is to be seen that the elastomeric element completely fills the control chamber.

Figure 3 shows the valve of figure 1, only in open position. Actuating member 7 is pulled in the direction indicated by arrow 10, whereby a contracting of the

13/09 '02 12:41 FAX 74882003

DANFOSS PATENT DPT.

0007/015

- 6 -

elastomeric element occurs in the area where the fluid passages 2 and 3 are connected to the control chamber. This contraction leaves free volume for fluid flow, indicated as position 11 at figure 3 and 4.

5

Most elastomeric materials has a constant volume, whereby contracting of an elastomeric element means expanding of the same elastomeric element. On figure 3 this material expansion is not to be seen, and on figure 1 no free volume for expansion of the elastomeric element is to be seen either. Never the less a certain expansion of the elastomeric element must be possible, either by some free volume or deformation of the support member 8. Also the exact position of the end point of the actuating member has to be in accordance with the geometry of the whole control valve. The position of the end point will move from figure 1 to figure 3, which also is not to be seen on the drawings. This passage also applies for figure 5 and 7.

20

As no fluid will be contained inside the control chamber when the actuating member is not activated, the valve offers a possibility of exact dosage of a fluid from inlet passage 2 to outlet passage 3.

25

An additional function of the control valve can be explained from figure 3 and 4. When the actuating member is activated, and the fluid thus is able to flow from fluid inlet passage 2 to fluid outlet passage 3, flow forces from the flow of fluid will act on the elastomeric element in the opening zone 11. These forces will force the elastomeric element in the flow direction, and at a given level of forces the fluid outlet passage 3 will be blocked by the elastomeric element 4. This means that the valve, in addition to its control function, has a flow

13/09 '02 12:41 FAX 74882003

DANFOSS PATENT DPT.

0008/015

- 7 -

restricting function, by which the flow will be limited to a given level. Of course this means that the actuating member has to be either able to bend with the elastomeric element, or must be connected in a flexible way to the  
5 pulling actuator. This flexible connection can easily be obtained, as the movement is very limited.

The pulling actuator for activating the actuating member could be substituted by a pushing actuator. The fixing  
10 point for the actuating member in the elastomeric element must be optimised for either pulling or pushing, but contraction of the elastomeric element in the area where the fluid passages 2 and 3 are connected to the control chamber will occur by pulling as well as by pushing.

15 Figure 5-8 shows another embodiment than that of figure 1-4, where slots 12 in the valve body, into which the elastomeric element is moulded, form the support of the elastomeric element 4. Further explanation shall not be  
20 made to the valve of figure 5-8, as all numbers and functions are identical to figure 1-4, except for the support of the elastomeric element.

Figure 9 shows a valve body 1, with a fluid inlet passage  
25 2 and a fluid outlet passage 3. Inside the valve body is a control chamber, which is partly filled by an elastomeric element 4. The elastomeric element 4 has a base part 13, which is fixed in the top part of the control chamber, and a control part 14, which is able to move inside the bottom  
30 part of the control chamber, however fixed to the top part 13 of the elastomeric element. The control part 14 is placed closer to the fluid inlet passage than to the fluid outlet passage.



13/09 '02 12:41 FAX 74882003

DANFOSS PATENT DPT.

0009/015

- 8 -

Figure 10 shows the valve of figure 9 in a situation where fluid flows from fluid inlet passage 2 to fluid outlet passage 3. The control part 14 of the elastomeric element is by the flow forces from the fluid flow forced in the flow direction towards the fluid outlet passage 3. At a certain level of flow, the control part 14 will block the fluid outlet passage, hereby offering a flow restriction function.

Figure 11 shows the valve of figure 9 in a situation where fluid flows, or attempts to flow, from fluid outlet passage 3 to fluid inlet passage 2. The control part 14 of the elastomeric element will block the fluid inlet passage due to the flow forces and the pressure difference, hereby offering a non-return function.

The level at which the non-return function and the flow restriction function will be activated depends on the position and the geometry of the control part 14 of the elastomeric element 4. Placed concentric in the control chamber the non-return function and the flow restriction function will be identically, and moving the control part 14 to a more and more eccentric position will give more and more distance between the level at which the two functions are activated.

13/09 '02 12:42 FAX 74882003

DANFOSS PATENT DPT.

010/015

- 9 -

Claims

1. A flow control valve comprising; a valve body (1)  
having a control chamber formed within said valve  
body, said control chamber being in fluid  
5 communication with a fluid inlet passage (2) and a  
fluid outlet passage (3); an elastomeric element (4)  
placed inside said control chamber, characterised in  
that flow forces from fluid communicated from one of  
said fluid passages to the other of said fluid  
10 passages will act on said elastomeric element and  
hereby form at least a part of the flow control  
function.
2. A flow control valve in accordance with claim 1,  
15 characterised in that the level of said flow forces,  
needed to perform said at least a part of the flow  
function, is lower from said fluid outlet passage to  
said fluid inlet passage, than from said fluid inlet  
passage to said fluid outlet passage.
- 20 3. A flow control valve in accordance with claim 1 or  
2, characterised in that only said flow forces forms  
said flow control function.
- 25 4. A flow control valve in accordance with claim 1,  
characterised in that an actuating member (7) is  
fixed to said elastomeric element, and that said  
flow control function, in addition to being formed  
by said flow forces, is formed by activating said  
30 actuating member.

13/09 '02 12:42 FAX 74882003

DANFOSS PATENT DPT.

011/015

- 10 -

5. A flow control valve in accordance with claim 4, characterised in that said elastomeric element, when said actuating member is not activated, prevents said fluid inlet passage from being in fluid communication with said fluid outlet passage.
6. A flow control valve in accordance with claim 4 or 5, characterised in that said control chamber, when said actuating member is not activated, is completely filled by said elastomeric element.
7. A flow control valve in accordance with any of the claims 4 to 6, characterised in that said elastomeric element, when said actuating member is activated, will be influenced by said flow forces, and by exceeding a certain level of flow forces will separate said fluid outlet passage from fluid communication with said control chamber.
8. A flow control valve comprising; a valve body (1) having a control chamber formed within said valve body, said control chamber being in fluid communication with a fluid inlet passage (2) and a fluid outlet passage (3); an elastomeric element (4) placed inside said control chamber; an actuating member (7) placed in connection with said elastomeric element, characterised in that said elastomeric element, when said actuating member is not activated, prevents fluid to be communicated from one of said fluid passages to the other of said fluid passages, and that the flow control function at least partly is formed by activating said actuating member.

13/09 '02 12:42 FAX 74882003

DANFOSS PATENT DPT.

012/015

- 11 -

Abstract

This invention relates to control valves for controlling  
of fluid flow, where the flow-controlling element in the  
valve body is of an elastomeric material. The control  
5 valve has only one flow-controlling element, which element  
fulfils all functions of the valve, meaning non-return  
function, flow-restriction function and/or controlling  
function.

13/09 '02 12:42 FAX 74882003

DANFOSS PATENT DPT.

013/015

Modtaget

13 SEP. 2002

PVS

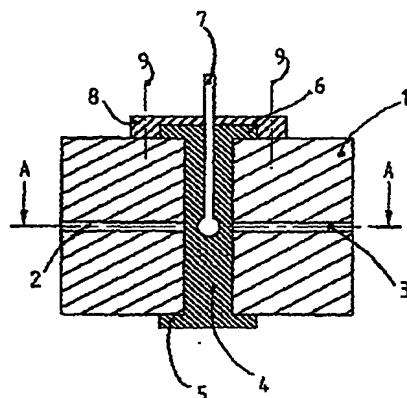


Fig 1




Fig 2

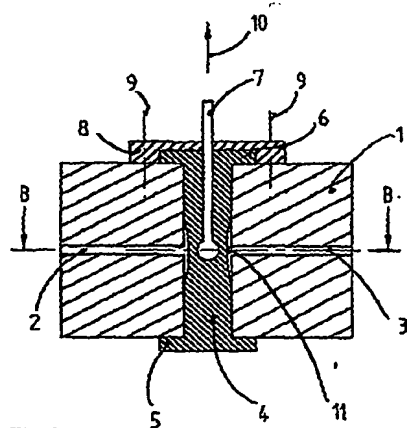


Fig 3




Fig 4

Modtaget  
13 SEP. 2002  
PVS

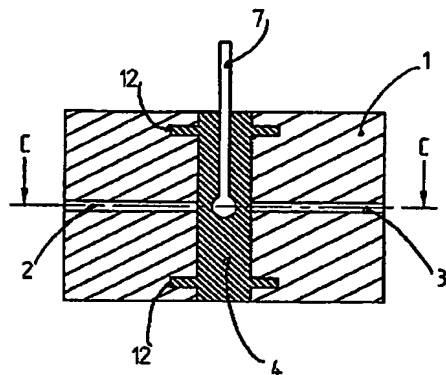


Fig 5




Fig 6

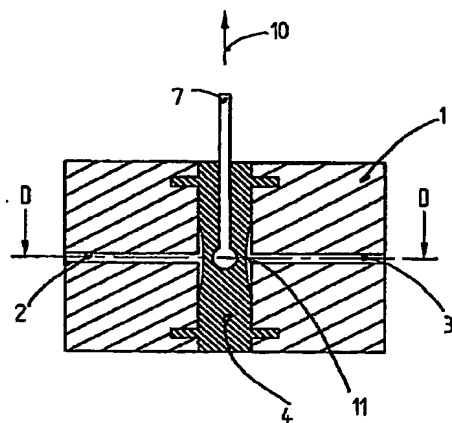


Fig 7




Fig 8

14882003

DANFOSS PATENT DPT.

Modtaget  
13 SEP. 2002  
PVS

Fig 9

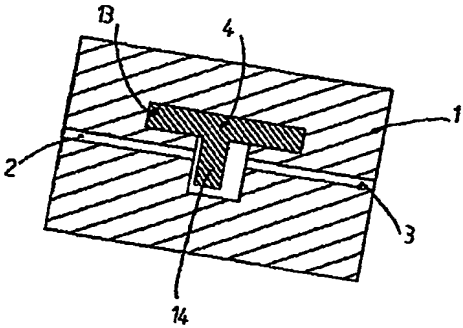


Fig 10


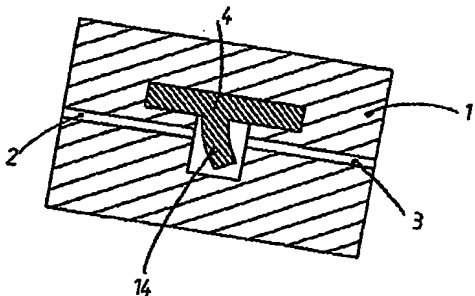


Fig 11

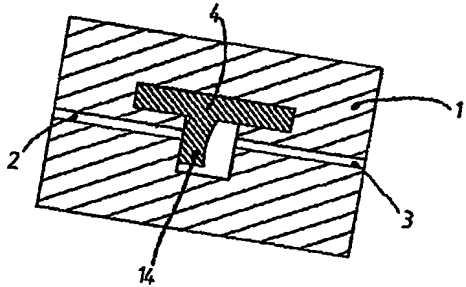

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**